

Irregular Surface Sanding / Painting before or After




砂布絲+木棕刷條

It's very easy and convenient to replace the brush wear strip on the hubs

Model no.	SL-300-4SH-OL
Max. working width	300mm
Max. working height	100mm
Min. Work-pieces length	520mm
Min. Work-pieces thickness	3/8" (9.5mm)
Feed speed adjustment by VFD	2~ 12 M/min
Speed of Sanding Wheel	200~ 1200 R.P.M
Top/ brushing head motor	3/4HP X 2
Conveyor motor / Variable speed	1/4HP



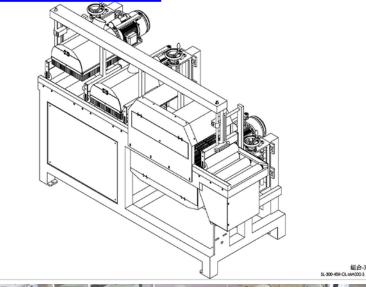



The Sanding heads adjust separately Upward, Downward